

ISO TC184/SC4/WG10 N272

Date: 1999-10-22

Supersedes ISO TC 184/SC4/WG10 N236

ISO/PDTS 10303-1007

Product data representation and exchange: Application module: General surface appearance

COPYRIGHT NOTICE:

This ISO document is a draft technical specification and is copyright protected by ISO. While the reproduction of draft technical specifications in any form for use by Participants in the ISO standards development process is permitted without prior permission from ISO, neither this document nor any extract from it may be reproduced, stored or transmitted in any form for any other purpose without prior written permission from ISO.

Requests for permission to reproduce this document for the purposes of selling it should be addressed as shown below (via the ISO TC 184/SC4 Secretariat's member body) or to ISO's member body in the country of the requester.

Copyright Manager
ANSI
11 West 42nd Street
New York, New York 10036
USA
phone: +1-212-642-4900
fax: +1-212-398-0023

Reproduction for sales purposes may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

ABSTRACT:

This document is an application module for non-shading surface presentation, including surface colour and wireframe style presentation.

KEYWORDS:

application module, appearance, surface presentation, wireframe presentation, surface colour

COMMENTS TO READER:

This document has been reviewed and noted by the ISO TC 184/SC4 Quality Committee and SC4 Secretariat and has been determined to be ready for this ballot cycle.

Project Leader: Rogerio Barra ATI/PDES, Inc. Address: 5300 International Boulevard North Charleston SC 29418 USA Telephone: (843) 760-3378 Telefacsimile: (843) 760-3349 Electronic mail: barra@aticorp.org	Project Editor: Darla Nettles Arthur D. Little, Inc. Address: 5300 International Blvd North Charleston, SC 29418 USA Telephone: (843) 760-3232 Telefacsimile: (843) 760-3349 Electronic mail: nettles@aticorp.org
--	--

1997-04

Contents

	Page
1 Scope	1
2 Normative references.....	1
3 Terms, definitions, and abbreviations	2
3.1 Terms defined in ISO 10303-1	2
3.2 Terms defined in ISO 10303-202	3
3.3 Terms defined in ISO 10303-1001	3
3.4 Abbreviations	3
4 Information requirements	3
4.1 Units of functionality	4
4.2 Required AM ARMs	5
4.3 ARM entity definitions.....	5
5 Module interpreted model	8
5.1 Mapping specification	8
5.2 MIM EXPRESS short listing	13
Annex A (normative) MIM short names	14
Annex B (normative) Information object registration	15
Annex C (informative) ARM EXPRESS-G.....	16
Annex D (informative) MIM EXPRESS-G	18
Annex E (informative) AM ARM and MIM EXPRESS	37
Bibliography	38
Index	39

Figures

Figure C.1 - ARM EXPRESS-G diagram 1 of 1	17
Figure D.1 - MIM EXPRESS-G diagram 1 of 18.....	19
Figure D.2 - MIM EXPRESS-G diagram 2 of 18.....	20
Figure D.3 - MIM EXPRESS-G diagram 3 of 18.....	21
Figure D.4 - MIM EXPRESS-G diagram 4 of 18.....	22
Figure D.5 - MIM EXPRESS-G diagram 5 of 18.....	23
Figure D.6 - MIM EXPRESS-G diagram 6 of 18.....	24
Figure D.7 - MIM EXPRESS-G diagram 7 of 18.....	25
Figure D.8 - MIM EXPRESS-G diagram 8 of 18.....	26
Figure D.9 - MIM EXPRESS-G diagram 9 of 18.....	27
Figure D.10 - MIM EXPRESS-G diagram 10 of 18.....	28
Figure D.11 - MIM EXPRESS-G diagram 11 of 18.....	29
Figure D.12 - MIM EXPRESS-G diagram 12 of 18.....	30

Figure D.13 - MIM EXPRESS-G diagram 13 of 18.....	31
Figure D.14 - MIM EXPRESS-G diagram 14 of 18.....	32
Figure D.15 - MIM EXPRESS-G diagram 15 of 18.....	33
Figure D.16 - MIM EXPRESS-G diagram 16 of 18.....	34
Figure D.17 - MIM EXPRESS-G diagram 17 of 18.....	35
Figure D.18 - MIM EXPRESS-G diagram 18 of 18.....	36

Tables

Table 1 - Mapping table for general_surface_appearance UoF.....	10
---	----

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

In other circumstances, particularly when there is an urgent market requirement for such documents, a technical committee may decide to publish other types of normative document:

- an ISO Publicly Available Specification (ISO/PAS) represents an agreement between technical experts in an ISO working group and is accepted for publication if it is approved by more than 50% of the members of the parent committee casting a vote;
- an ISO Technical Specification (ISO/TS) represents an agreement between the members of a technical committee and is accepted for publication if it is approved by 2/3 of the members of the committee casting a vote.

An ISO/PAS or ISO/TS is reviewed every three years with a view to deciding whether it can be transformed into an International Standard.

ISO/PDTS 10303-1007 was prepared by Technical Committee ISO/TC 184, Industrial automation systems and integration, Subcommittee SC4, Industrial data.

This International Standard is organized as a series of parts, each published separately. The parts of ISO 10303 fall into one of the following series: description methods, integrated resources, application interpreted constructs, application modules, application protocols, abstract test suites, implementation methods, and conformance testing. The series are described in ISO 10303-1. A complete list of parts of ISO 10303 is available from the Internet:

<<http://www.nist.gov/sc4/editing/step/titles/>>.

Annexes A and B form an integral part of this part of ISO 10303. Annexes C, D and E are for information only.

Introduction

ISO 10303 is an International Standard for the computer-interpretable representation and exchange of product data. The objective is to provide a neutral mechanism capable of describing product data throughout the life cycle of a product, independent from any particular system. The nature of this description makes it suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases and archiving.

This International Standard is organized as a series of parts, each published separately. The parts of ISO 10303 fall into one of the following series: description methods, integrated resources, application interpreted constructs, application protocols, application modules, abstract test suites, implementation methods, and conformance testing. The series are described in ISO 10303-1. This part of ISO 10303 is a member of the application module series.

This part of ISO 10303 specifies an application module for non-shading surface presentation, including surface colour and wireframe style presentation. This application module does not include specifications for realistic presentation of surfaces or scientific visualization.

For an example of bringing together a set of application modules to provide the capability to assign shape elements to layers and visual attributes, such as colours and curve fonts, to geometric and topological elements, see Annex F of ISO 10303-1009.

Industrial automation systems and integration — Product data representation and exchange — Part 1007: Application module: General surface appearance

1 Scope

This part of ISO 10303 specifies the application module for non-shaded surface presentation, encompassing surface colour and wireframe-style visual attributes.

The following are within scope of this part of ISO 10303:

- specification of visual attributes which may be assigned to curves belonging to surfaces;
- selection of specific curve types for wireframe-like presentation of surfaces;
- specification of a mechanism for assignment of colour to surfaces.

The following are outside the scope of this part of ISO 10303:

- realistic presentation of surfaces;
- scientific visualization.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 8824-1:1994, *Information technology — Open systems interconnection — Abstract syntax notation one (ASN.1) — Part 1: Specification of basic notation*.

ISO 10303-1:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 1: Overview and fundamental principles*.

ISO 10303-11:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 11: Description methods: The EXPRESS language reference manual.*

ISO/DIS 10303-41:1999, *Industrial automation systems and integration — Product data representation and exchange — Part 41: Integrated generic resource: Fundamentals of product description and support.*

ISO 10303-46:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 46, Integrated generic resources: Visual presentation.*

ISO 10303-202:1996, *Industrial automation systems and integration — Product data representation and exchange — Part 202: Application protocol: Associative draughting.*

ISO 10303-1001:¹⁾ *Industrial automation systems and integration — Product data representation and exchange — Application module: Appearance assignment.*

ISO 10303-1002:¹⁾ *Industrial automation systems and integration — Product data representation and exchange — Application module: Colour.*

ISO 10303-1003:¹⁾ *Industrial automation systems and integration — Product data representation and exchange — Application module: Curve appearance.*

3 Terms, definitions, and abbreviations

3.1 Terms defined in ISO 10303-1

For the purposes of this part of ISO 10303, the following terms defined in ISO 10303-1 apply:

- application;
- application object;
- application protocol;
- application reference model;
- data;
- information;
- integrated resource;
- product;

¹⁾ To be published.

- product data;
- unit of functionality.

3.2 Terms defined in ISO 10303-202

For the purposes of this part of ISO 10303, the following terms defined in ISO 10303-202 apply:

- application interpreted construct.

3.3 Terms defined in ISO 10303-1001

For the purposes of this part of ISO 10303, the following terms defined in ISO 10303-1001 apply:

- application module.

3.4 Abbreviations

For the purposes of this part of ISO 10303, the following abbreviations apply:

AM	application module
ARM	application reference model
MIM	module integrated model
UoF	unit of functionality
URL	uniform resource locator

4 Information requirements

This clause specifies the information requirements for general surface appearance. The information requirements are specified as a set of units of functionality and application objects. The information requirements are defined using the terminology of the subject area of this application module.

NOTE 1 - A graphical representation of the information requirements is given in annex C.

NOTE 2 - The mapping specification is specified in 5.1 which shows how the information requirements are met using the integrated resources of this International Standard. The use of the integrated resources introduces additional requirements which are common to application modules and protocols.

EXPRESS specification:

```
* )  
SCHEMA general_surface_appearance_arm;  
(*
```

4.1 Units of functionality

This subclause specifies the units of functionality for this part of ISO 10303. This application module specifies the following unit of functionality:

- general_surface_appearance.

This module uses the following units of functionality:

- colour;
- curve_appearance.

The units of functionality and a description of the functions that each UoF supports are given below. The application elements included in the UoFs are defined in 4.3.

4.1.1 General_surface_appearance

The general_surface_appearance UoF specifies application objects for presentation of surfaces using wireframe-style attributes and surface colour.

The following application objects are specified in the general_surface_appearance UoF:

- Boundary_curve_appearance;
- Control_grid_appearance;
- Parameter_line_appearance;
- Segmentation_curve_appearance;
- Silhouette_curve_appearance;
- Surface_appearance_wireframe;
- Surface_colour;
- Surface_related_curve_appearance.

4.1.2 Colour

This UoF is defined in the colour application module. (See ISO 10303-1002.) The following application entities from this UoF are referenced by the general surface appearance module:

- Colour.

4.1.3 Curve_appearance

This UoF is defined in the curve appearance module. (See ISO 10303-1003.) The following application elements from this UoF are referenced in the general surface appearance module:

- Curve_appearance.

4.2 Required AM ARMs

The following EXPRESS interface statements specify the application elements imported from the ARMs of other application modules.

EXPRESS specification:

```
* )
USE FROM colour_arm; -- ISO 10303-1002
USE FROM curve_appearance_arm; -- ISO 10303-1003
(*
```

4.3 ARM entity definitions

This subclause specifies the application entities for the general surface appearance module. Each application entity is an atomic element that embodies a unique application concept and contains attributes specifying the data elements of the object. The application entities and their definitions are given below.

4.3.1 Boundary_curve_appearance

A Boundary_curve_appearance is the curve style that is applied to the boundary curves of a surface.

EXPRESS specification:

```
* )
ENTITY boundary_curve_appearance
SUBTYPE OF (surface_related_curve_appearance);
END_ENTITY;
(*)
```

4.3.2 Control_grid_appearance

A Control_grid_appearance is the curve style that is applied to the mesh of control points which are used for the definition of surfaces.

EXPRESS specification:

```
* )
ENTITY control_grid_appearance
    SUBTYPE OF (surface_related_curve_appearance);
END_ENTITY;
(*)
```

4.3.3 Parameter_line_appearance

A Parameter_line_appearance is the curve style that is applied to the iso-parameter lines on a surface.

EXPRESS specification:

```
* )
ENTITY parameter_line_appearance
    SUBTYPE OF (surface_related_curve_appearance);
    number_of_u_curves:INTEGER;
    number_of_v_curves:INTEGER;
END_ENTITY;
(*
```

Attribute definitions:

number_of_u_curves: specifies the number of iso-parameter lines to be presented in the u direction.

number_of_v_curves: specifies the number of iso-parameter lines to be presented in the v direction.

4.3.4 Segmentation_curve_appearance

A Segmentation_curve_appearance is the curve style that is applied to the curves on the segment borders of a surface.

EXPRESS specification:

```
* )
ENTITY segmentation_curve_appearance
    SUBTYPE OF (surface_related_curve_appearance);
END_ENTITY;
(*)
```

4.3.5 Silhouette_curve_appearance

A Silhouette_curve_appearance is the curve style that is applied to the silhouette curves of a surface.

EXPRESS specification:

```
* )
ENTITY silhouette_curve_appearance
    SUBTYPE OF (surface_related_curve_appearance);
END_ENTITY;
(*)
```

4.3.6 Surface_appearance_wireframe

A Surface_appearance_wireframe specifies visual attributes for the wireframe-like presentation of a surface.

EXPRESS specification:

```
*)  
ENTITY surface_appearance_wireframe;  
    side          : STRING;  
    styles        : SET [1:5] OF surface_related_curve_appearance;  
END_ENTITY;  
(*
```

Attribute definitions:

side: specifies the side of a surface to which the styles are applied.

styles: the curve styles used for the wireframe-like surface presentation.

4.3.7 Surface_colour

A Surface_colour specifies the colour for non-shading presentation of a surface.

EXPRESS specification:

```
*)  
ENTITY surface_colour;  
    side          : STRING;  
    assigned_colour : colour;  
END_ENTITY;  
(*
```

Attribute definitions:

side: specifies the side of a surface to which colour is applied.

assigned_colour: the colour used for non-shading surface presentation.

4.3.8 Surface_related_curve_appearance

A Surface_related_curve_appearance is a generalization of the styles assigned to curves for wireframe-like surface presentation.

EXPRESS specification:

```
*)  
ENTITY surface_related_curve_appearance  
ABSTRACT SUPERTYPE OF (ONEOF(boundary_curve_appearance,  
silhouette_curve_appearance, segmentation_curve_appearance,  
control_grid_appearance, parameter_line_appearance));  
  
    style : curve_appearance;  
END_ENTITY;  
(*
```

Attribute definitions:

style: specifies the curve appearance associated with each curve type in the context of wireframe-like surface presentation

EXPRESS specification:

```
* )
END_SCHEMA; -- general_surface_appearance_arm
(*
```

5 Module interpreted model

5.1 Mapping specification

This clause contains the mapping table that shows how each UoF and application element of this part of ISO 10303 maps to one or several MIM resource constructs. The mapping table is organized in five columns. The contents of these five columns are:

Column 1) Application element: Name of an application element as it appears in the application object definition in 4.2. Application object names are written in uppercase. Attribute names are listed after the application object to which they belong and are written in lower case.

Column 2) MIM element: Name of an MIM element as it appears in the MIM, the term `IDENTICAL MAPPING', or the term `PATH'. MIM entities are written in lower case. Attribute names of MIM entities are referred to as <entity name>.<attribute name>. The mapping of an application element may result in several related MIM elements. Each of these MIM elements requires a line of its own in the table. The term `IDENTICAL MAPPING' indicates that both application objects of an application assertion map to the same MIM element. The term `PATH' indicates that the application assertion maps to the entire reference path.

Column 3) Source: For those MIM elements that are interpreted from the integrated resources, this is the number of the corresponding part of ISO 10303.

Column 4) Rules: One or more numbers may be given that refer to rules that apply to the current MIM element or reference path. For rules that are derived from relationships between application objects, the same rule is referred to by the mapping entries of all the involved MIM elements. The expanded names of the rules are listed after the table.

Column 5) Reference path: To describe fully the mapping of an application object, it may be necessary to specify a reference path through several related MIM elements. The reference path column documents the role of an MIM element relative to the MIM element in the row succeeding it.

Two or more such related MIM elements define the interpretation of the integrated resources that satisfies the requirement specified by the application object. For each MIM element that has been created for use within this part of ISO 10303, a reference path up to its supertype from an integrated resource is specified.

For the expression of reference paths and the relationships between MIM elements the following notational conventions apply:

- a) [] : multiple MIM elements or sections of the reference path are required to satisfy an information requirement;
- b) () : multiple MIM elements or sections of the reference path are identified as alternatives within the mapping to satisfy an information requirement;
- c) {} : enclosed section constrains the reference path to satisfy an information requirement;
- d) -> : attribute references the entity or select type given in the following row;
- e) <- : entity or select type is referenced by the attribute in the following row;
- f) [i] : attribute is an aggregation of which a single member is given in the following row;
- g) [n] : attribute is an aggregation of which member n is given in the following row;
- h) => : entity is a supertype of the entity given in the following row;
- i) <= : entity is a subtype of the entity given in the following row;
- j) = : the string, select, or enumeration type is constrained to a choice or value;
- k) \ : the line continuation for strings that wrap.

Table 1 - Mapping table for general_surface_appearance UoF

Application element	MIM element	Source	Rules	Reference path
BOUNDARY_CURVE_- APPEARANCE	surface_style_boundary	46		
CONTROL_GRID_- APPEARANCE	surface_style_control_- grid	46		
PARAMETER_LINE_- APPEARANCE	surface_style_parameter_- line	46		
number_of_u_curves	u_direction_count	46		surface_style_parameter_line surface_style_parameter_line.direction_counts[1] -> direction_count_select direction_count_select = u_direction_count u_direction_count
number_of_v_curves	v_direction_count	46		surface_style_parameter_line surface_style_parameter_line.direction_counts[1] -> direction_count_select direction_count_select = v_direction_count v_direction_count
SEGMENTATION_CURVE_- APPEARANCE	surface_style_- segmentation_curve	46		
SILHOUETTE_CURVE_- APPEARANCE	surface_style_silhouette	46		
SURFACE_APPEARANCE_- WIREFRAME	surface_style_usage	46		
side	surface_side	46		surface_style_usage surface_style_usage.side -> surface_side
styles	PATH			surface_style_usage surface_style_usage.style ->

Table 1 - Mapping table for general_surface_appearance UoF

Application element	MIM element	Source	Rules	Reference path
				surface_side_style_select surface_side_style_select = surface_side_style surface_side_style surface_side_style.styles[i] -> surface_style_element_select
SURFACE_COLOUR	surface_style_usage	46		
side	surface_side	46		
assigned_colour	PATH			surface_style_usage surface_style_usage.style -> surface_side_style_select surface_side_style_select = surface_side_style surface_side_style surface_side_style.styles[i] -> surface_style_element_select surface_style_elelment_select=surface_style_fill_area surface_style_fill_area.fill_area-> fill_area_style fill_area_style.fill_styles[i]-> fill_style_select fill_style_select=fill_area_style.colour fill_area_style.colour.fill.colour-> colour
SURFACE RELATED _ - CURVE_APPEARANCE	surface_style_element_ - select	46		
style	PATH			surface_style_element_select (surface_style_element_select=surface_style_parameter_line surface_style_parameter_line surface_style_parameter_line.style_of_parameter_lines ->

Table 1 - Mapping table for general_surface_appearance UoF

Application element	MIM element	Source	Rules	Reference path
				<p>curve_or_render</p> <p>curve_or_render = curve_style</p> <p>curve_style)</p> <p>(surface_style_element_select=surface_style_silhouette</p> <p>surface_style_silhouette</p> <p>surface_style_silhouette.style_of_silhouette -></p> <p>curve_or_render</p> <p>curve_or_render = curve_style</p> <p>curve_style)</p> <p>(surface_style_element_select=surface_style_control_grid</p> <p>surface_style_control_grid</p> <p>surface_style_control_grid.style_of_control_grid -></p> <p>curve_or_render</p> <p>curve_or_render = curve_style</p> <p>curve_style)</p> <p>(surface_style_element_select=surface_style_boundary</p> <p>surface_style_boundary</p> <p>surface_style_boundary.style_of_boundary -></p> <p>curve_or_render</p> <p>curve_or_render = curve_style</p> <p>curve_style)</p> <p>(surface_style_element_select=surface_style_segmentation_curve</p> <p>surface_style_segmentation_curve</p> <p>surface_style_segmentation_curve.style_of_segmentation_curve-></p> <p>curve_or_render</p> <p>curve_or_render = curve_style</p> <p>curve_style)</p>

5.2 MIM EXPRESS short listing

This subclause specifies the EXPRESS schema that uses elements from the integrated resources, application interpreted constructs or application module MIMs and contains the types, entity specializations, rules, and functions that are specific to this part of ISO 10303. This clause also specifies modifications to the textual material for constructs that are imported from the integrated resources. The definitions and EXPRESS provided in the integrated resources or application interpreted constructs for constructs used in the MIM may include select list items and subtypes which are not imported into the MIM. Requirements stated in the integrated resources or application interpreted constructs which refer to such items and subtypes apply exclusively to those items which are imported into the MIM.

EXPRESS specification:

```

*) SCHEMA general_surface_appearance_mim;
USE FROM colour_mim;      -- ISO 10303-1002
USE FROM curve_appearance_mim;    -- ISO 10303-1003
USE FROM presentation_appearance_schema    -- ISO 10303-46
( fill_area_style_colour,
  surface_side,
  surface_side_style,
  surface_style_boundary,
  surface_style_control_grid,
  surface_style_element_select,
  surface_style_fill_area,
  surface_style_parameter_line,
  surface_style_segmentation_curve,
  surface_style_silhouette,
  surface_style_usage,
  u_direction_count,
  v_direction_count);
(*

```

NOTE - The schema referenced above can be found in the following part of ISO 10303:

colour_mim	ISO 10303-1002
curve_appearance_mim	ISO 10303-1003
presentation_appearance_schema	ISO 10303-46

EXPRESS specification:

```

*) END_SCHEMA;
(*

```

Annex A
(normative)**MIM short names**

Entity names in this part of ISO 10303 have been defined in other parts of ISO 10303. Requirements on the use of the short names are found in the implementation methods included in ISO 10303. The EXPRESS MIM short names are available from the Internet:

<<http://www.mel.nist.gov/div826/subject/apde/snr/>>

Annex B
(normative)**Information object registration****B.1 Document identification**

In order to provide for unambiguous identification of an information object in an open system, the object identifier

{ iso standard 10303 part(1007) version(-1) }

is assigned to this part of ISO 10303. The meaning of this value is defined in ISO/IEC 8824-1, and is described in ISO 10303-1.

B.2 Schema identification

To provide for unambiguous identification of the schema specifications given in this application module in an open information system, the object identifiers are assigned as follows:

{ iso standard 10303 part(1001) version(-1) object(1) general-surface-appearance-arm(1) }

is assigned to the general_surface_appearance_arm schema.

{ iso standard 10303 part(1001) version(-1) object(2) general-surface-appearance-mim(1) }

is assigned to the general_surface_appearance_mim schema. The meaning of this value is defined in ISO 8824-1, and is described in ISO 10303-1.

Annex C
(informative)**ARM EXPRESS-G**

The following diagrams correspond to the ARM EXPRESS listing given in clause 4. The diagrams use the EXPRESS-G graphical notation for the EXPRESS language. EXPRESS-G is defined in annex D of ISO 10303-11.

NOTE - The inter-page referencing is to the diagram number and not the figure number.

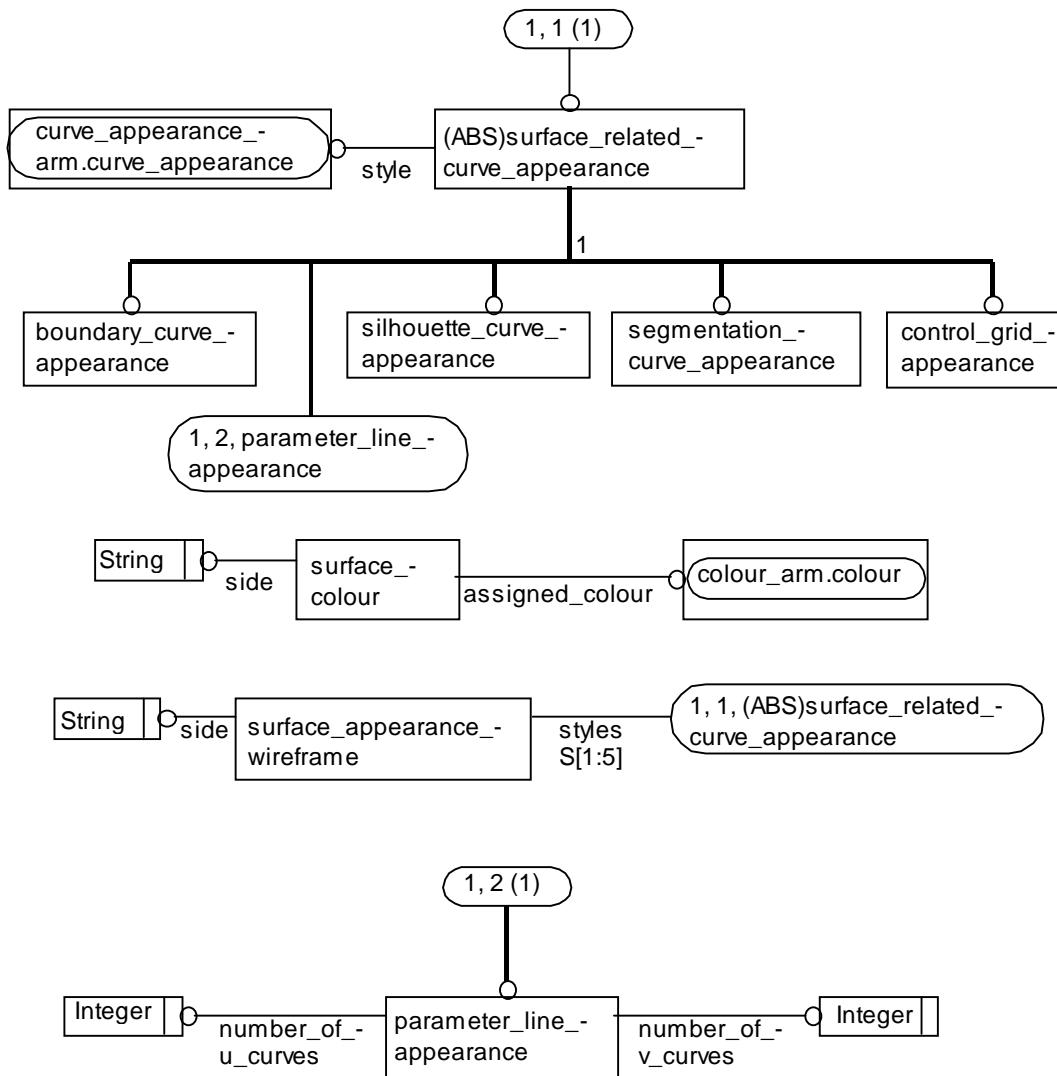


Figure C.1 - ARM EXPRESS-G diagram 1 of 1

Annex D
(informative)

MIM EXPRESS-G

The following diagrams correspond to the MIM EXPRESS. The diagrams use the EXPRESS-G graphical notation for the EXPRESS language. EXPRESS-G is defined in annex D of ISO 10303-11.

NOTE - The inter-page referencing is to the diagram number and not the figure number.

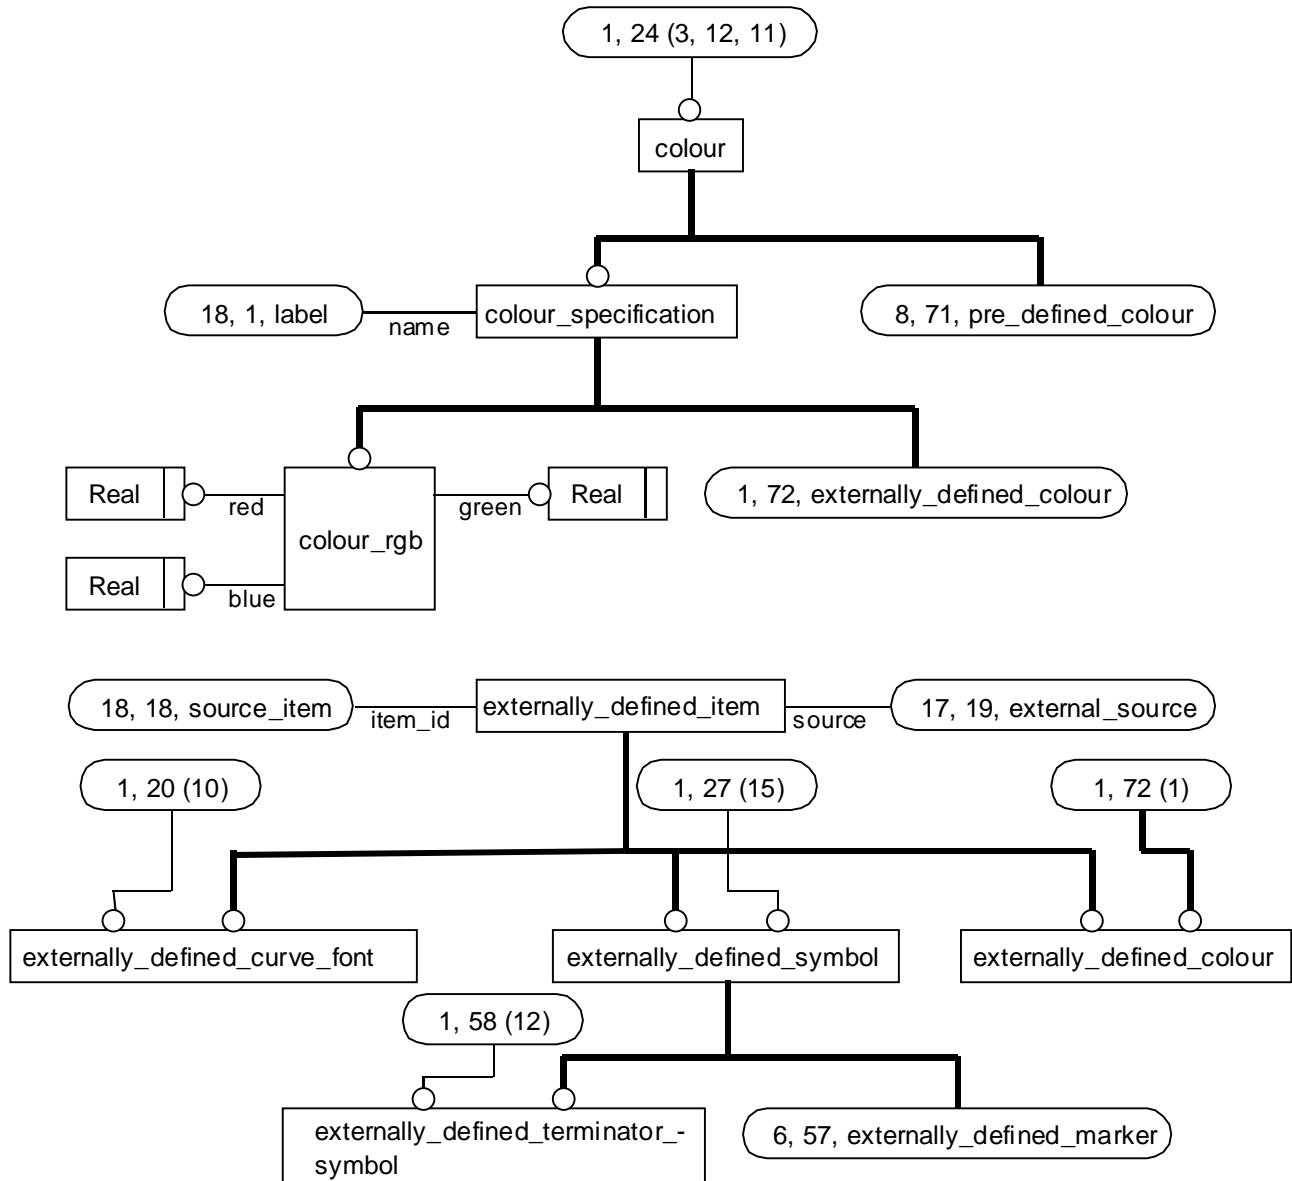


Figure D.1 - MIM EXPRESS-G diagram 1 of 18

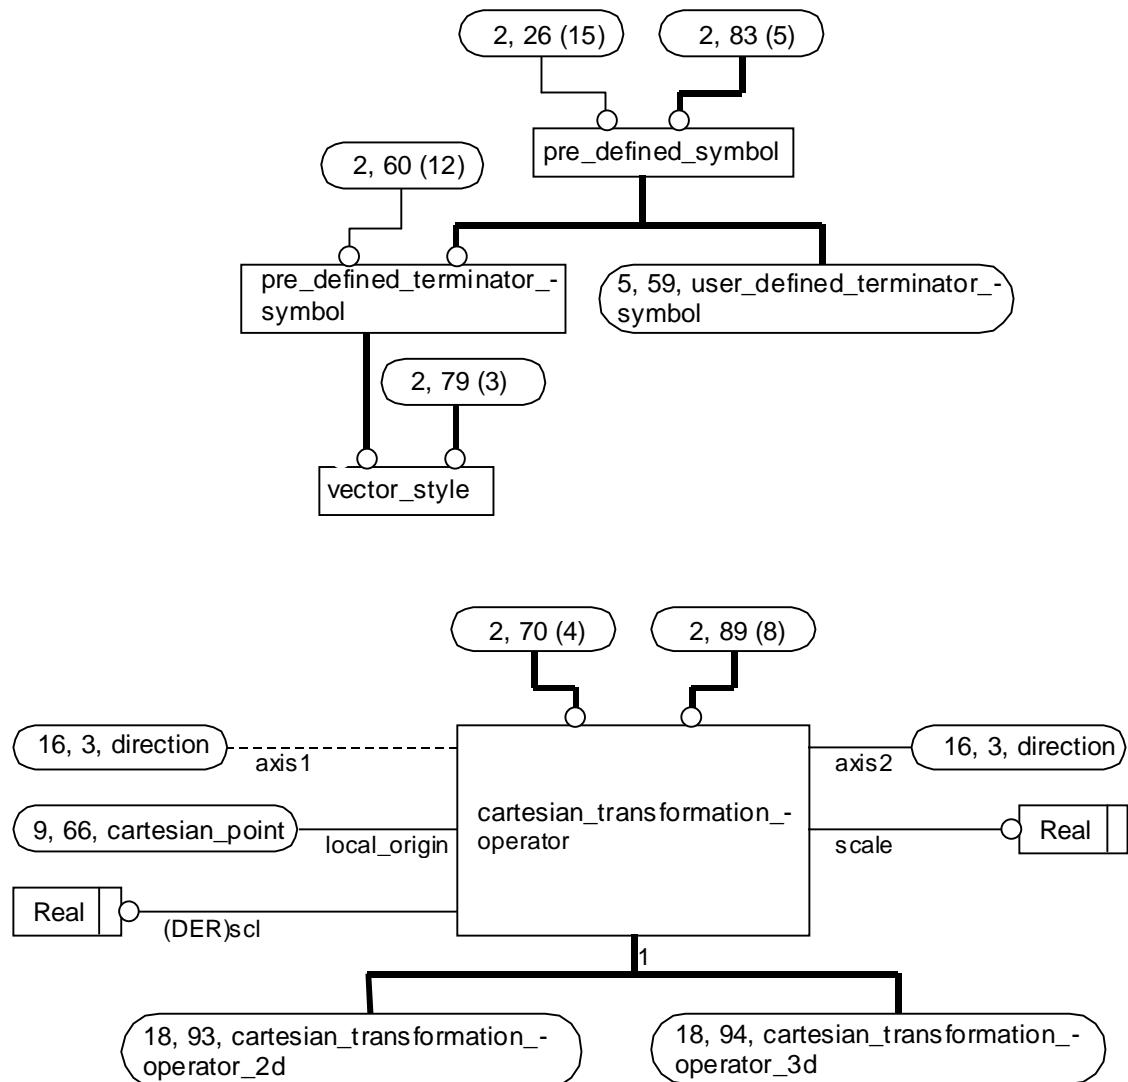


Figure D.2 - MIM EXPRESS-G diagram 2 of 18

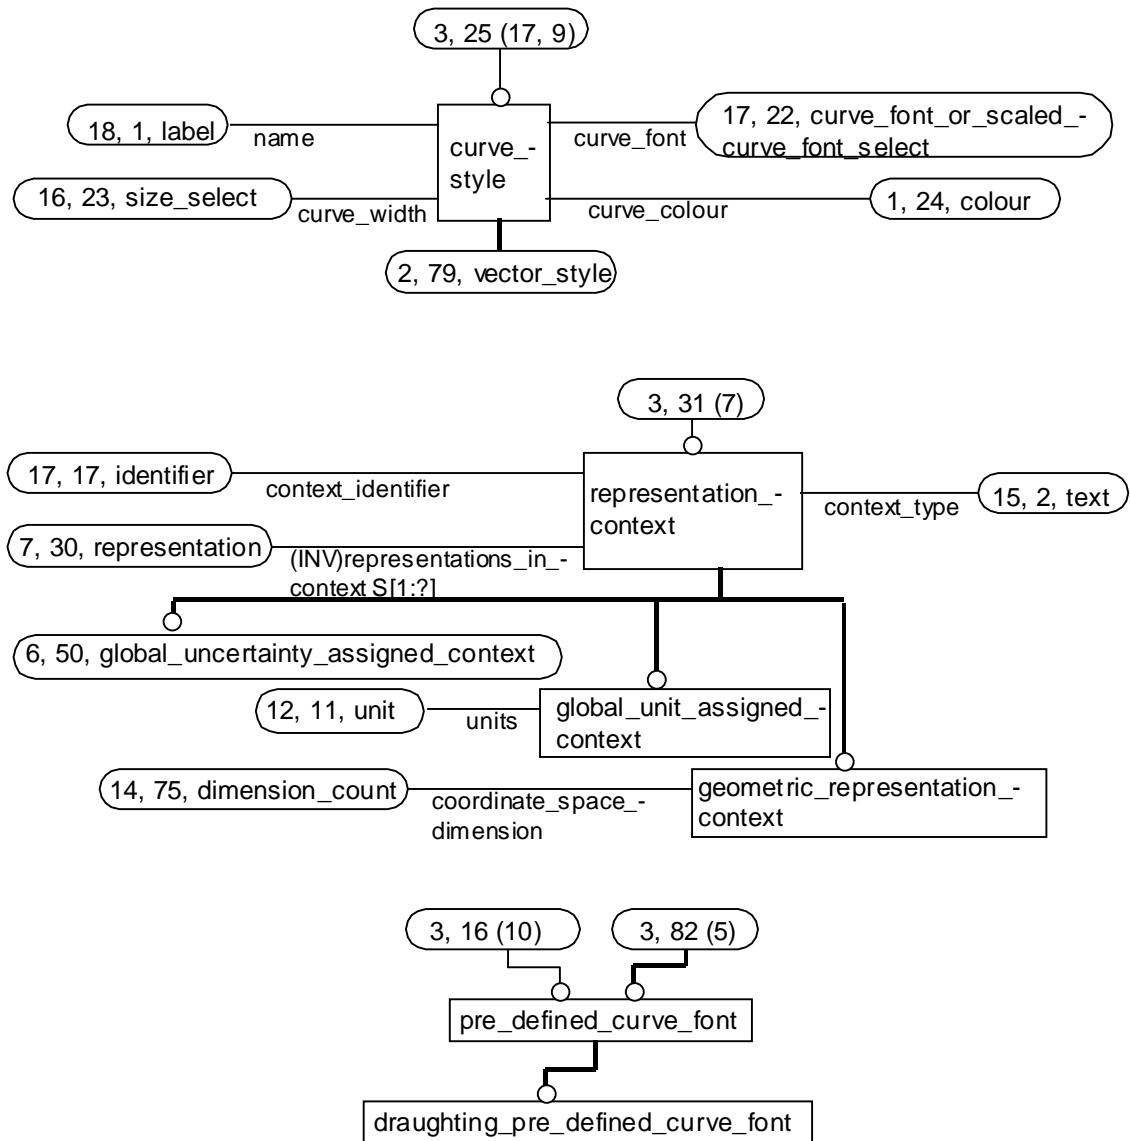


Figure D.3 - MIM EXPRESS-G diagram 3 of 18

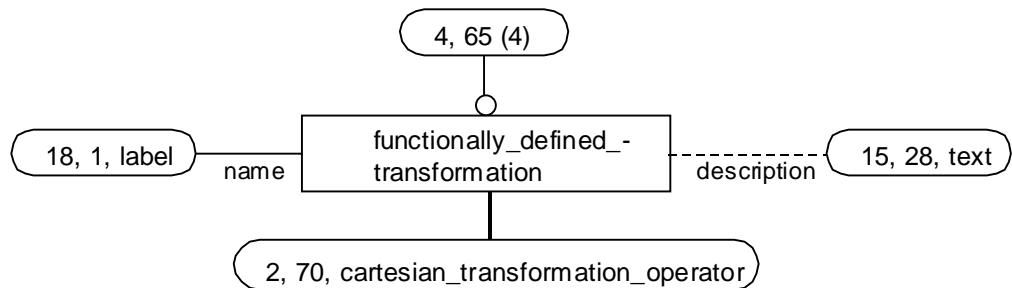
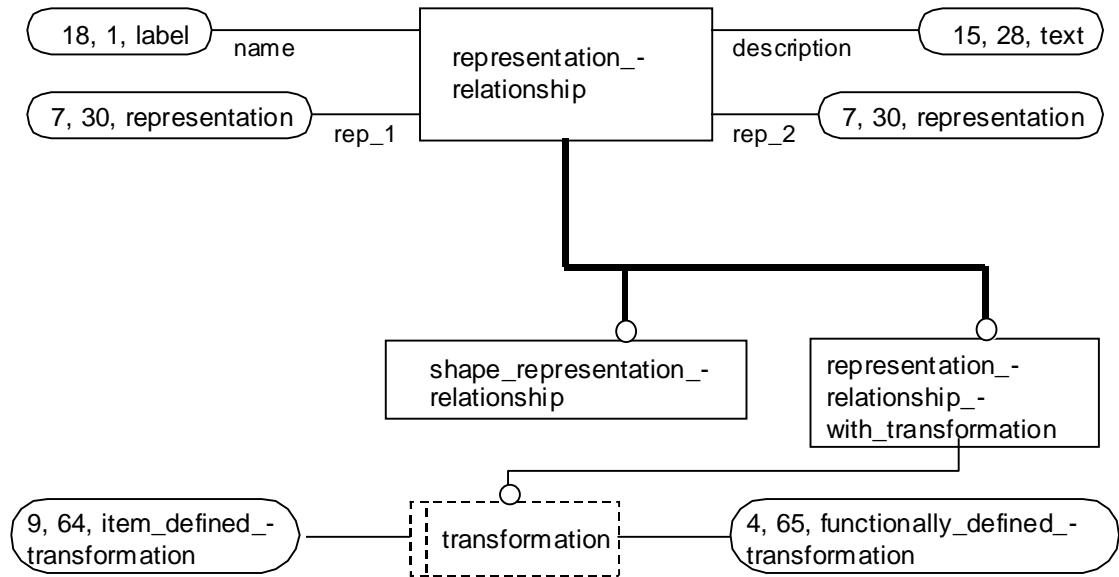


Figure D.4 - MIM EXPRESS-G diagram 4 of 18

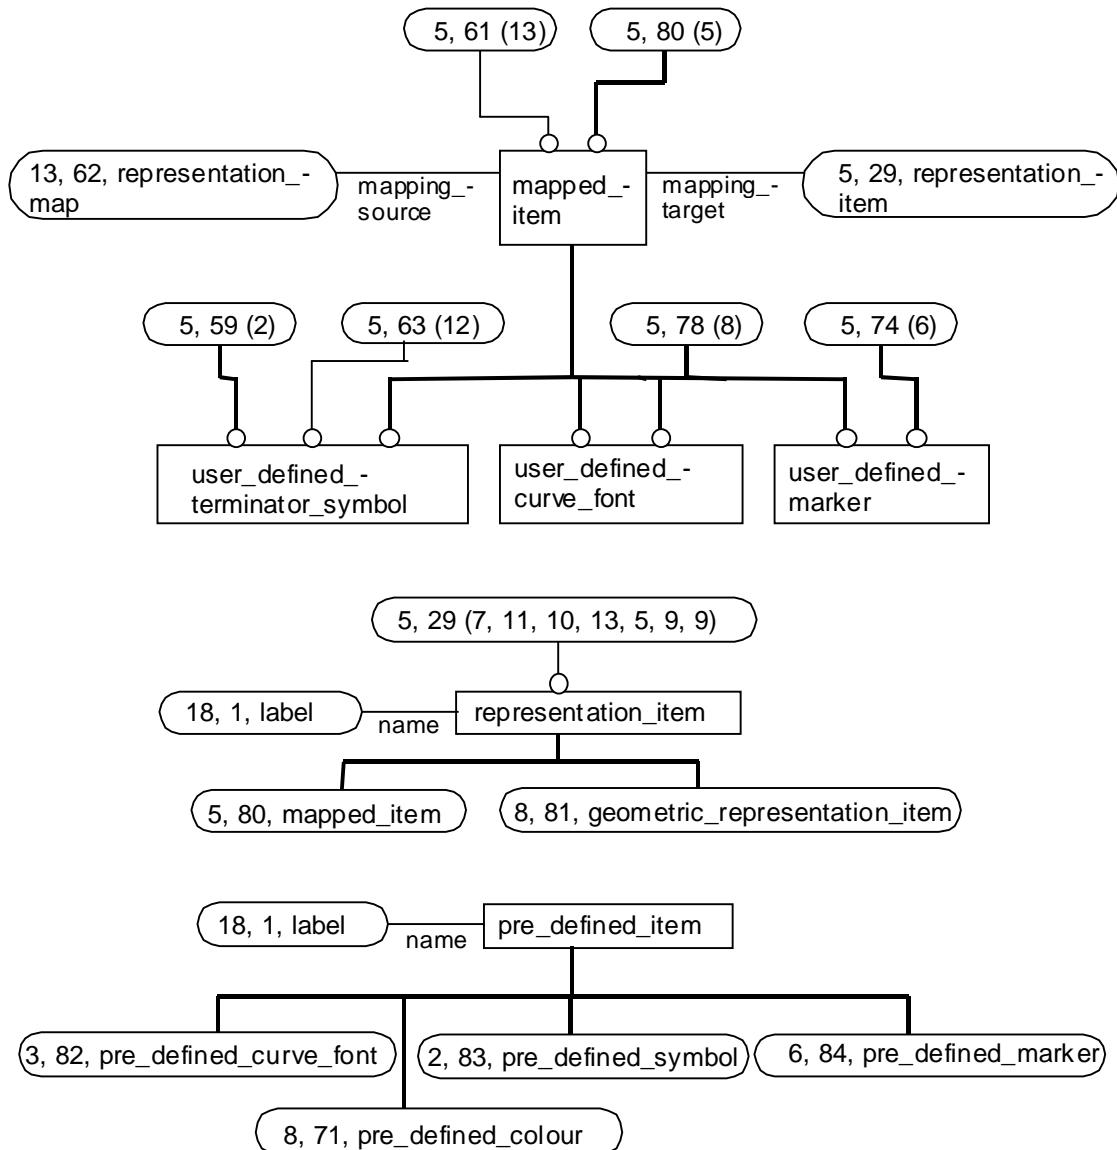
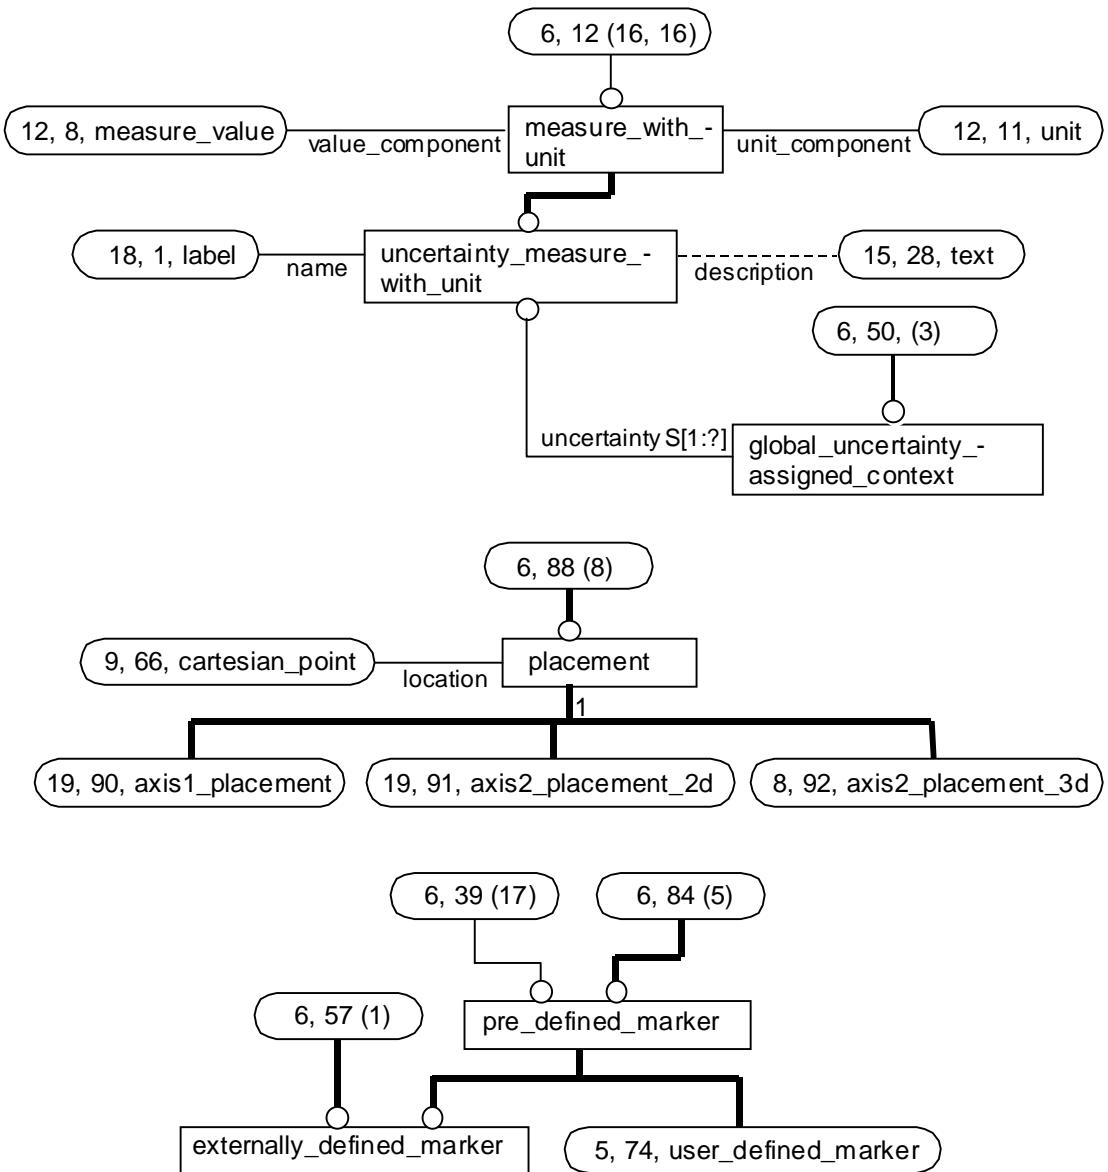


Figure D.5 - MIM EXPRESS-G diagram 5 of 18

**Figure D.6 - MIM EXPRESS-G diagram 6 of 18**

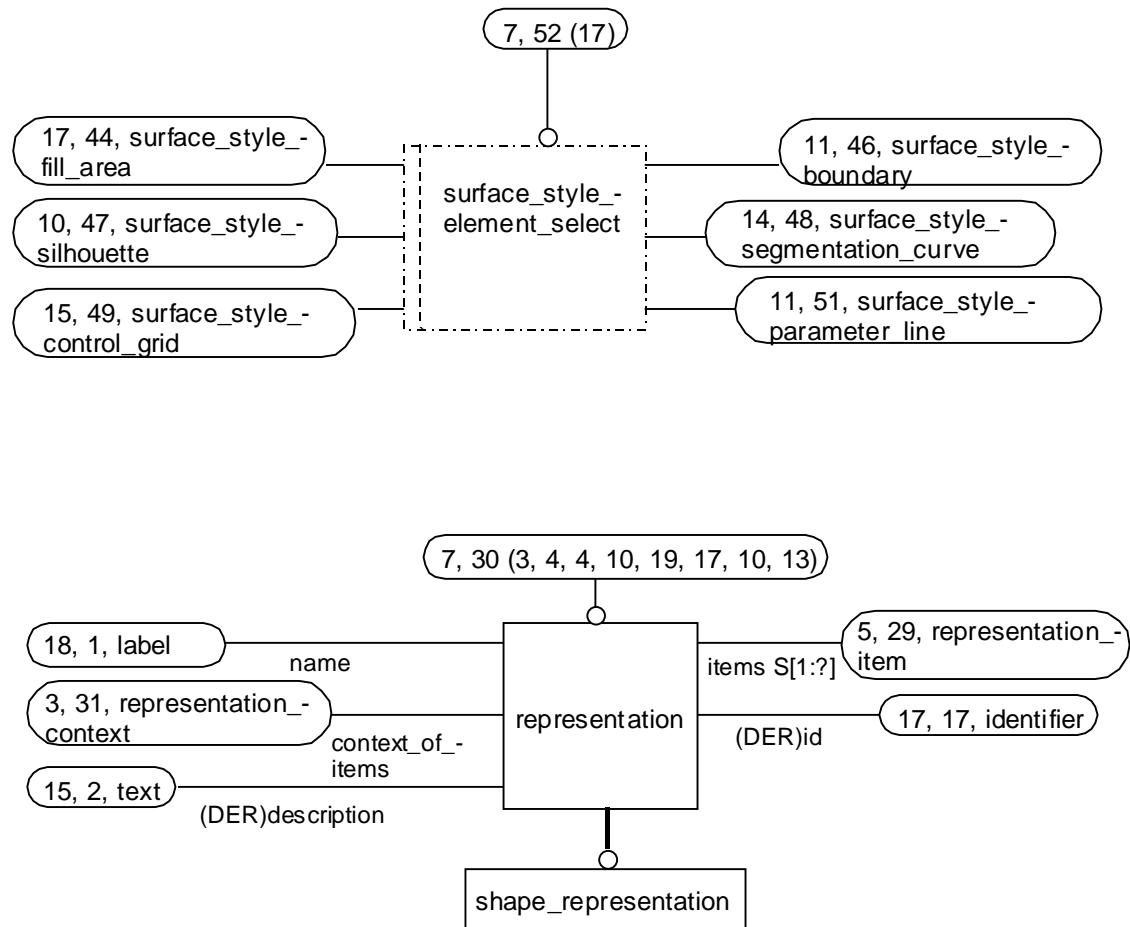


Figure D.7 - MIM EXPRESS-G diagram 7 of 18

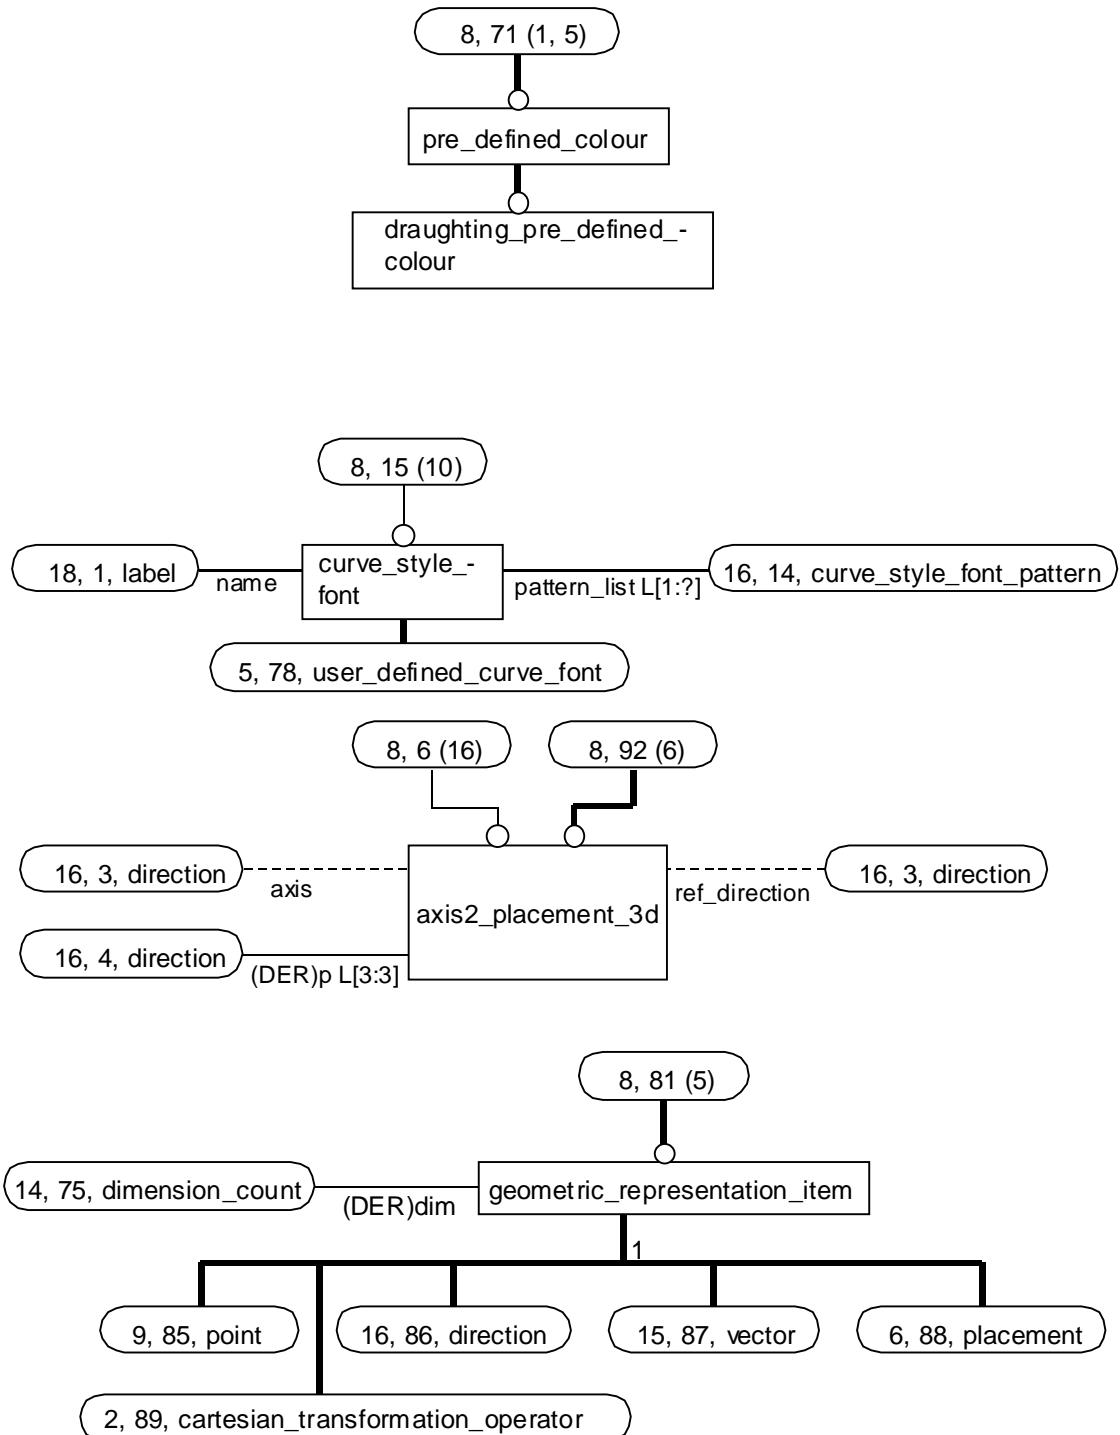


Figure D.8 - MIM EXPRESS-G diagram 8 of 18

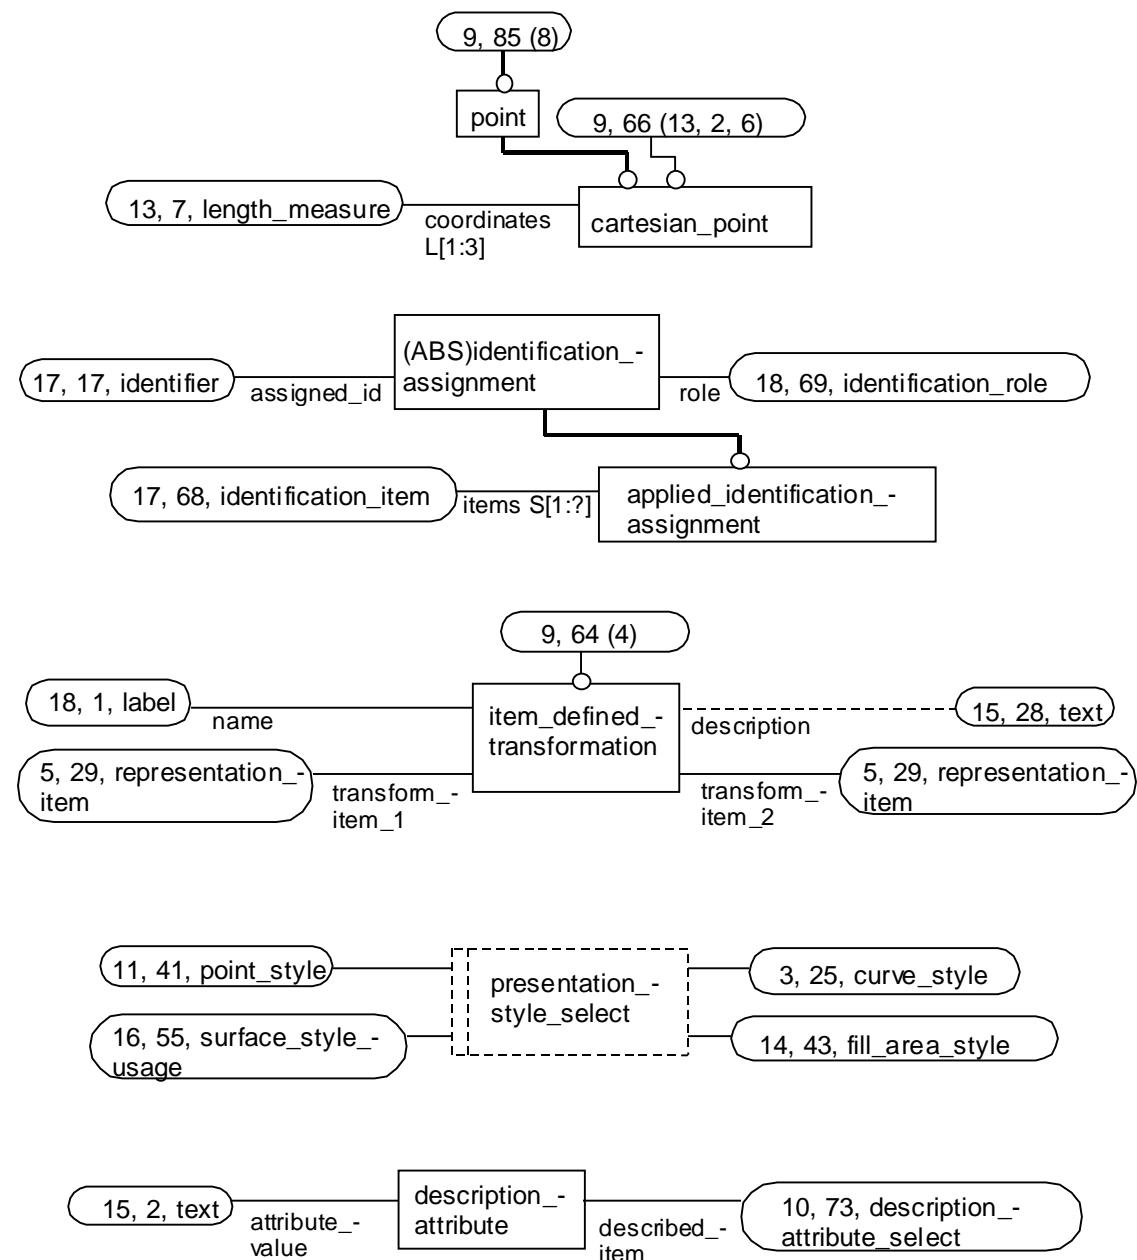
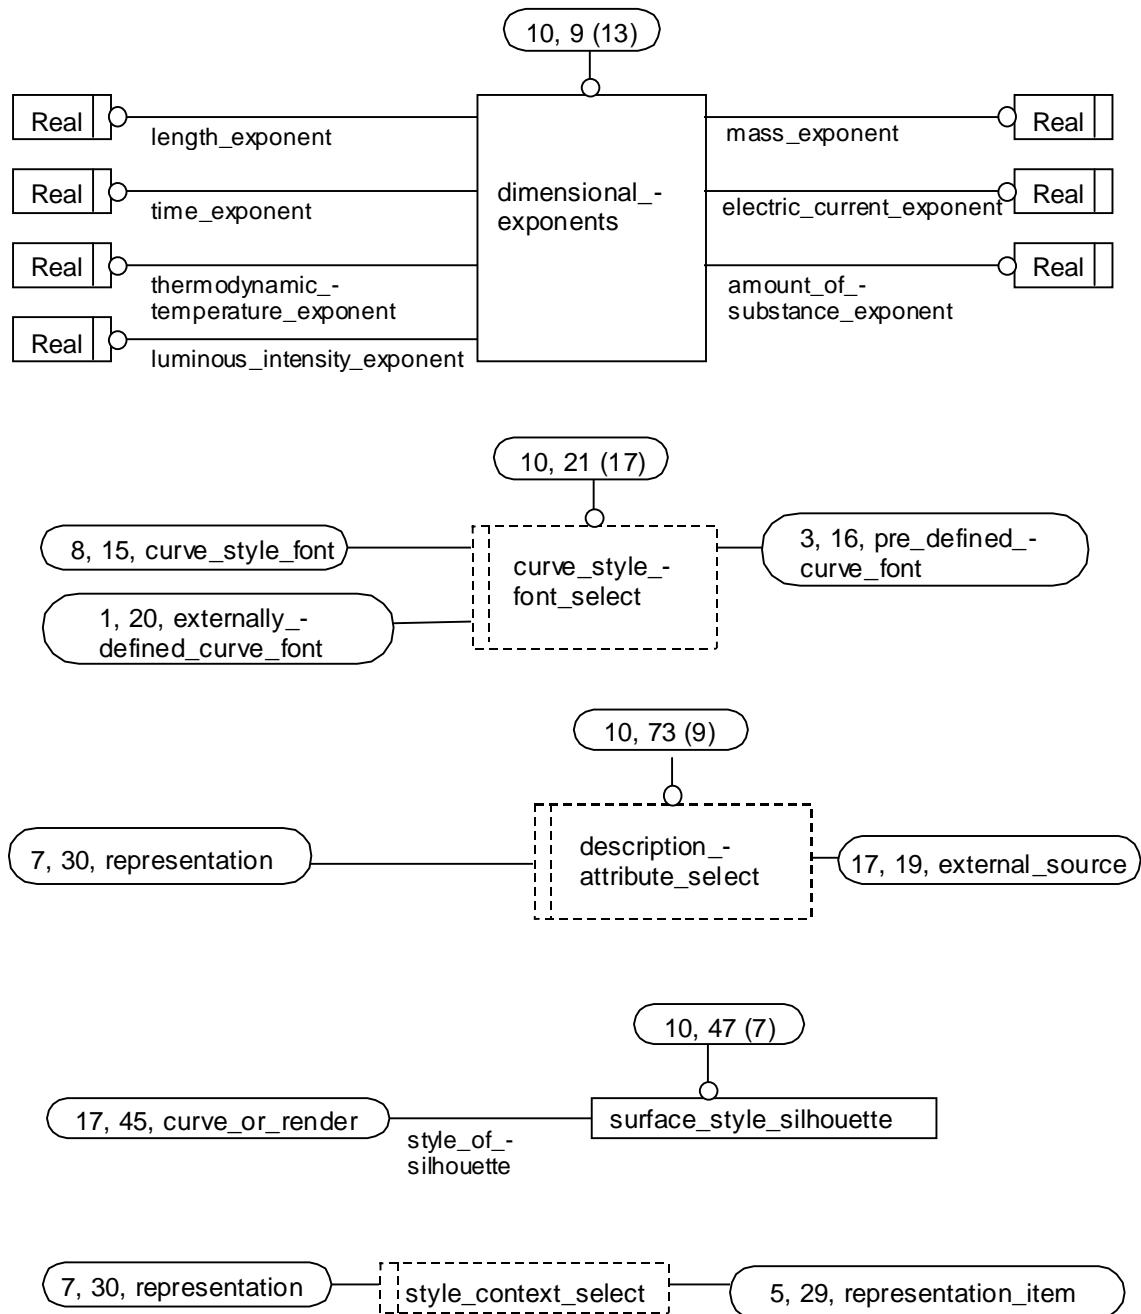


Figure D.9 - MIM EXPRESS-G diagram 9 of 18

**Figure D.10 - MIM EXPRESS-G diagram 10 of 18**

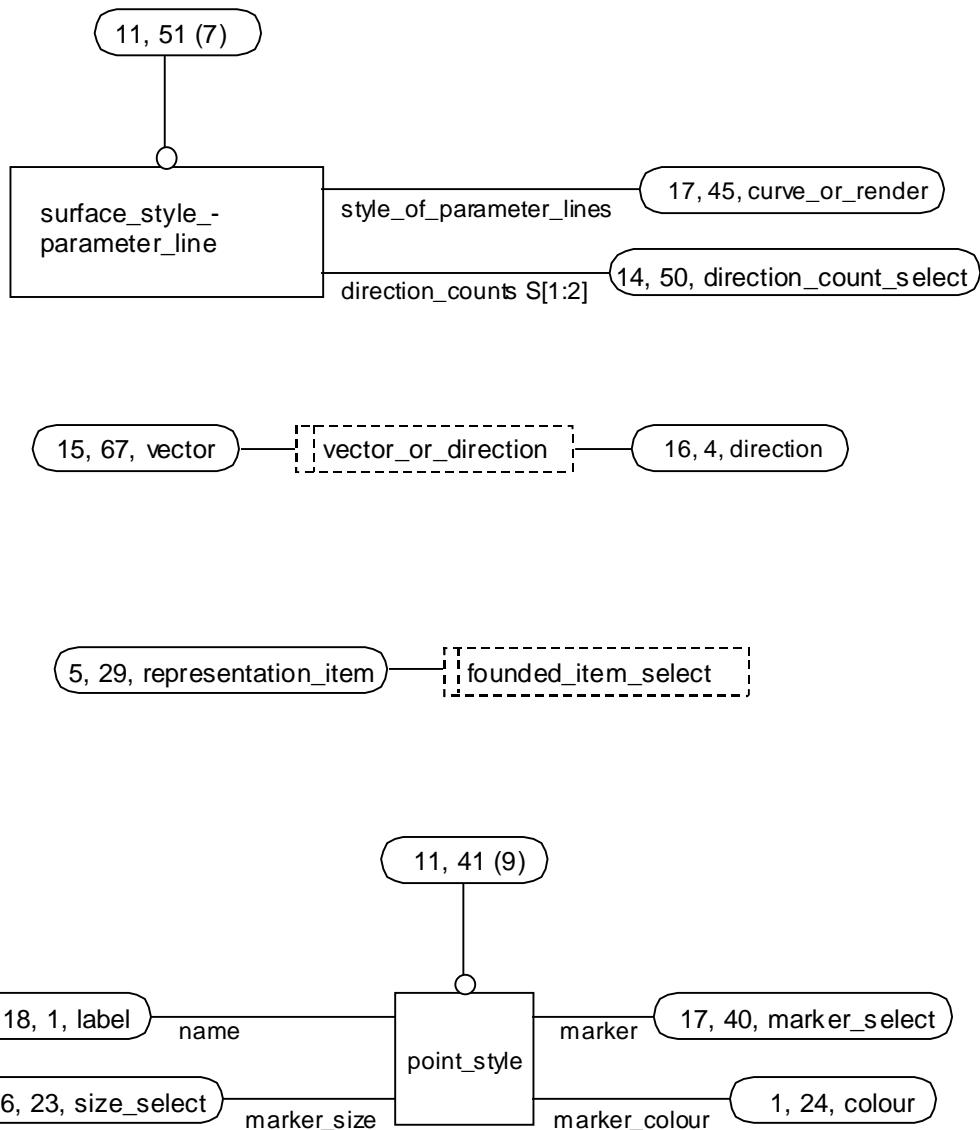


Figure D.11 - MIM EXPRESS-G diagram 11 of 18

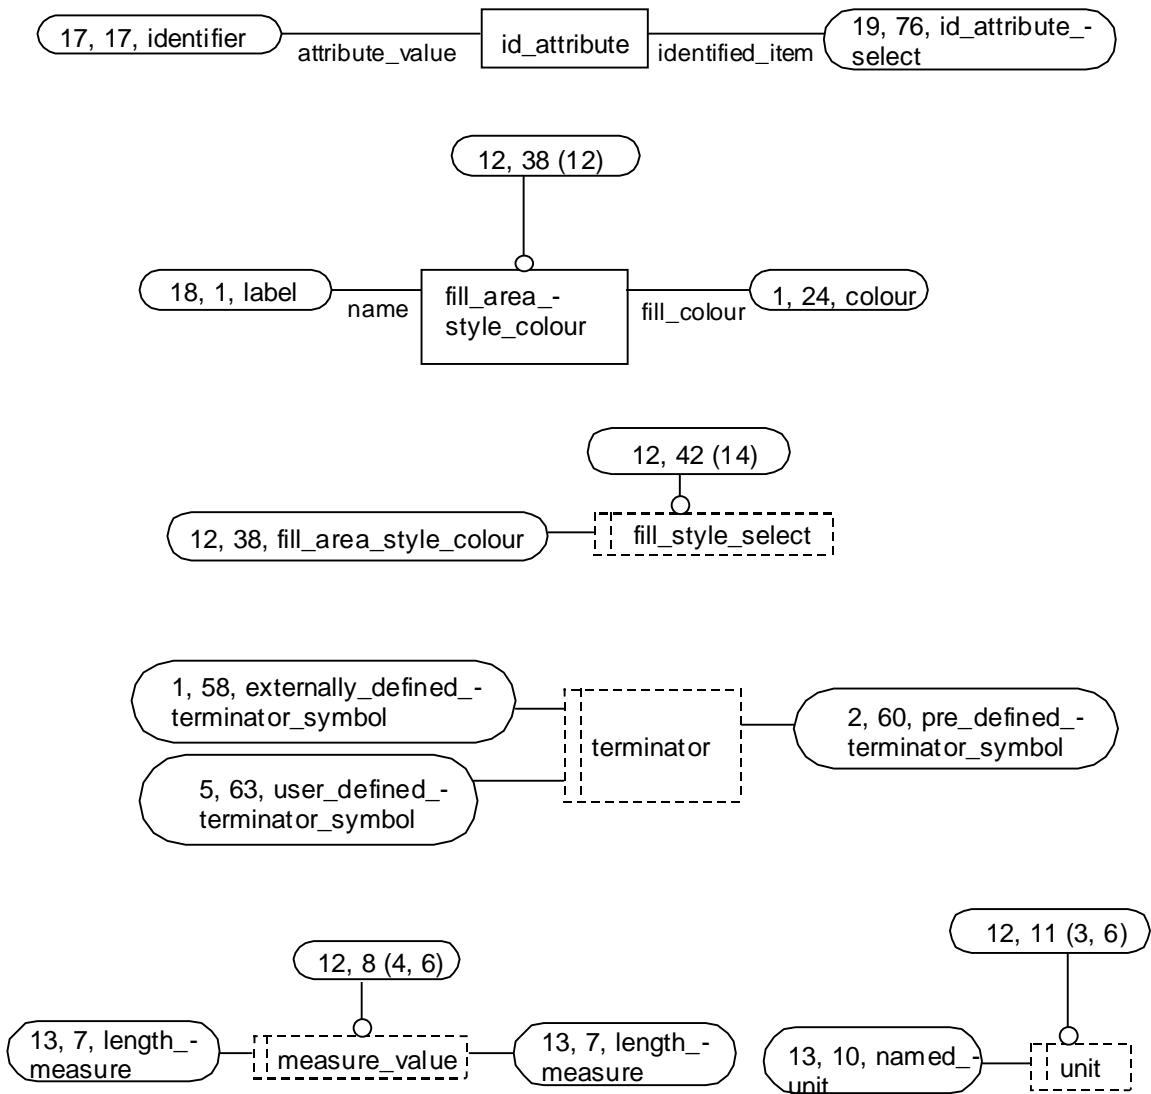


Figure D.12 - MIM EXPRESS-G diagram 12 of 18

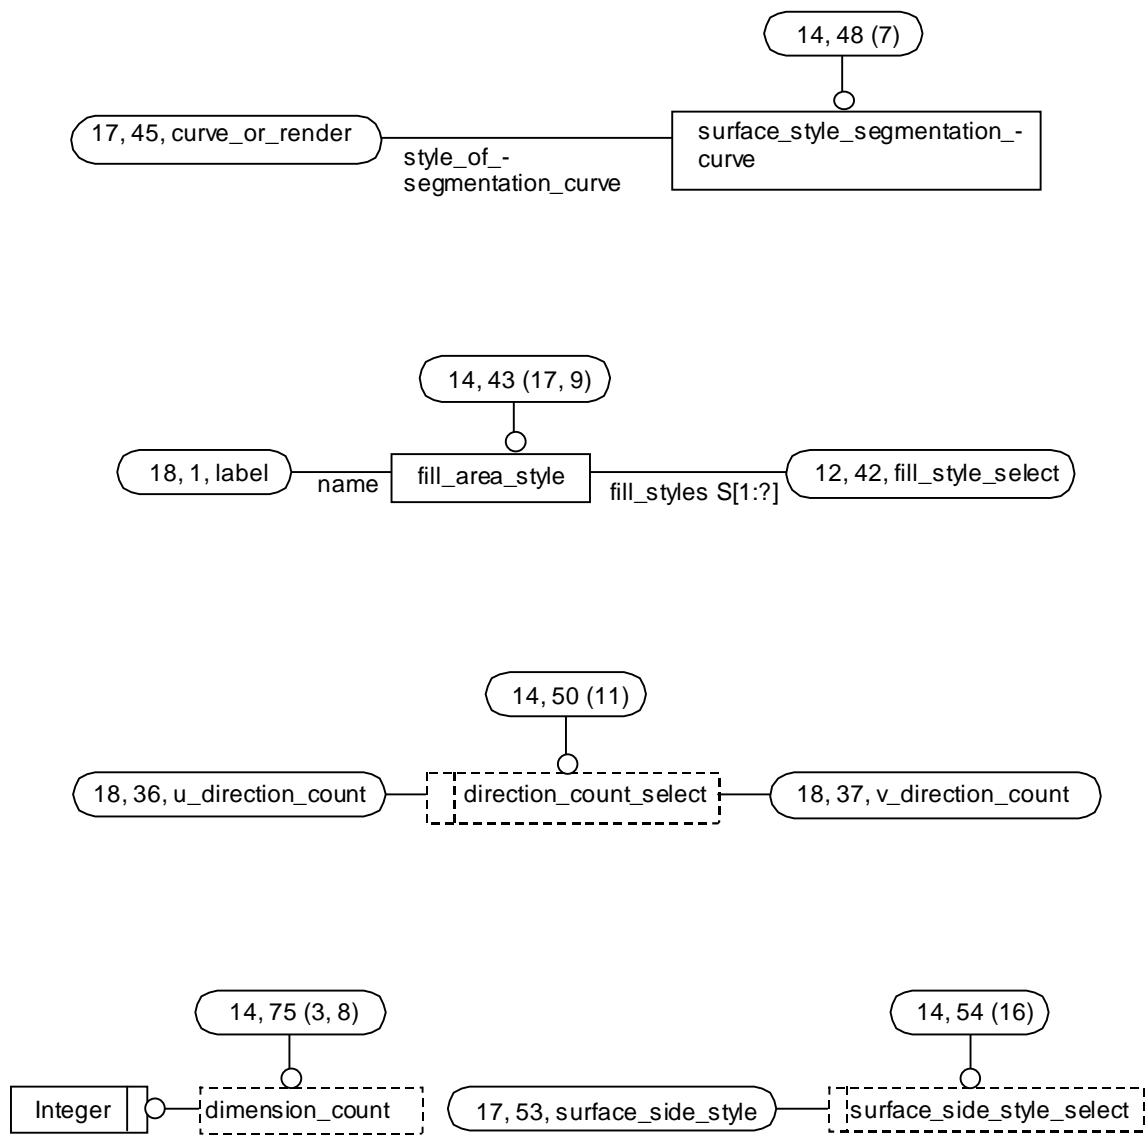


Figure D.13 - MIM EXPRESS-G diagram 13 of 18

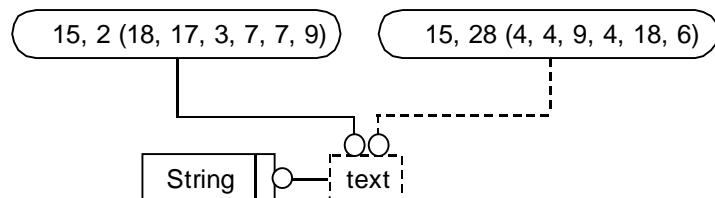
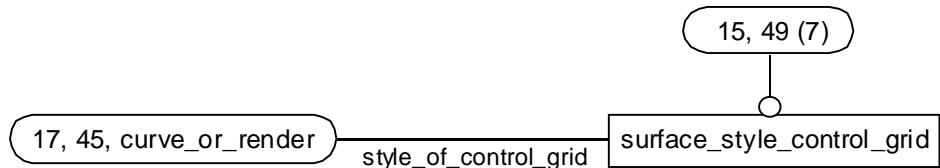
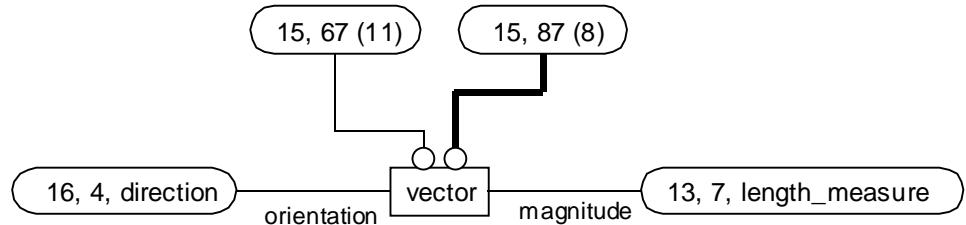



Figure D.14 - MIM EXPRESS-G diagram 14 of 18

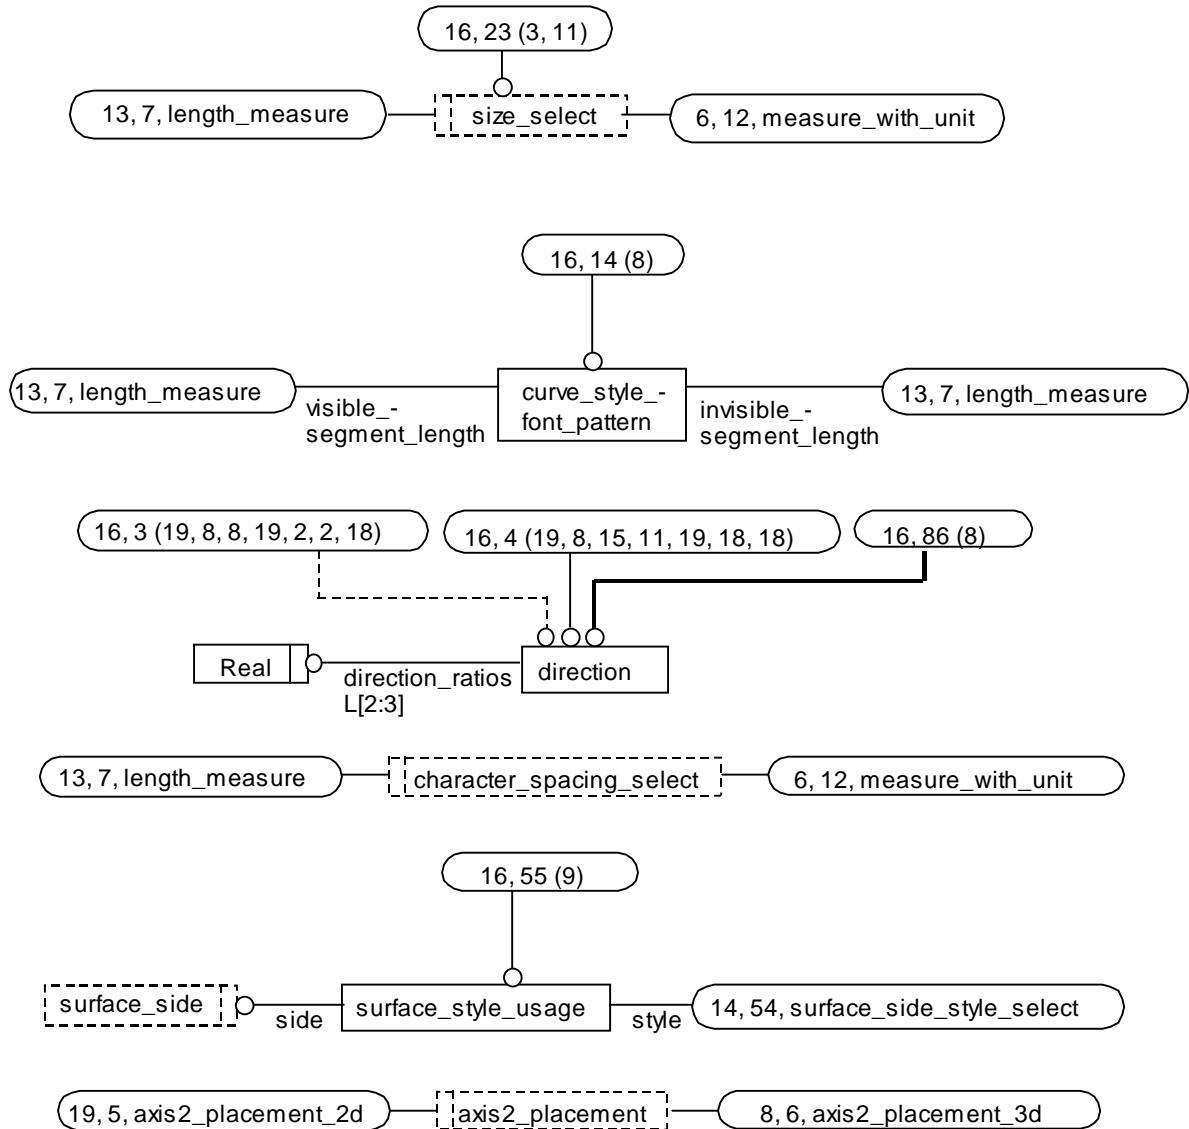
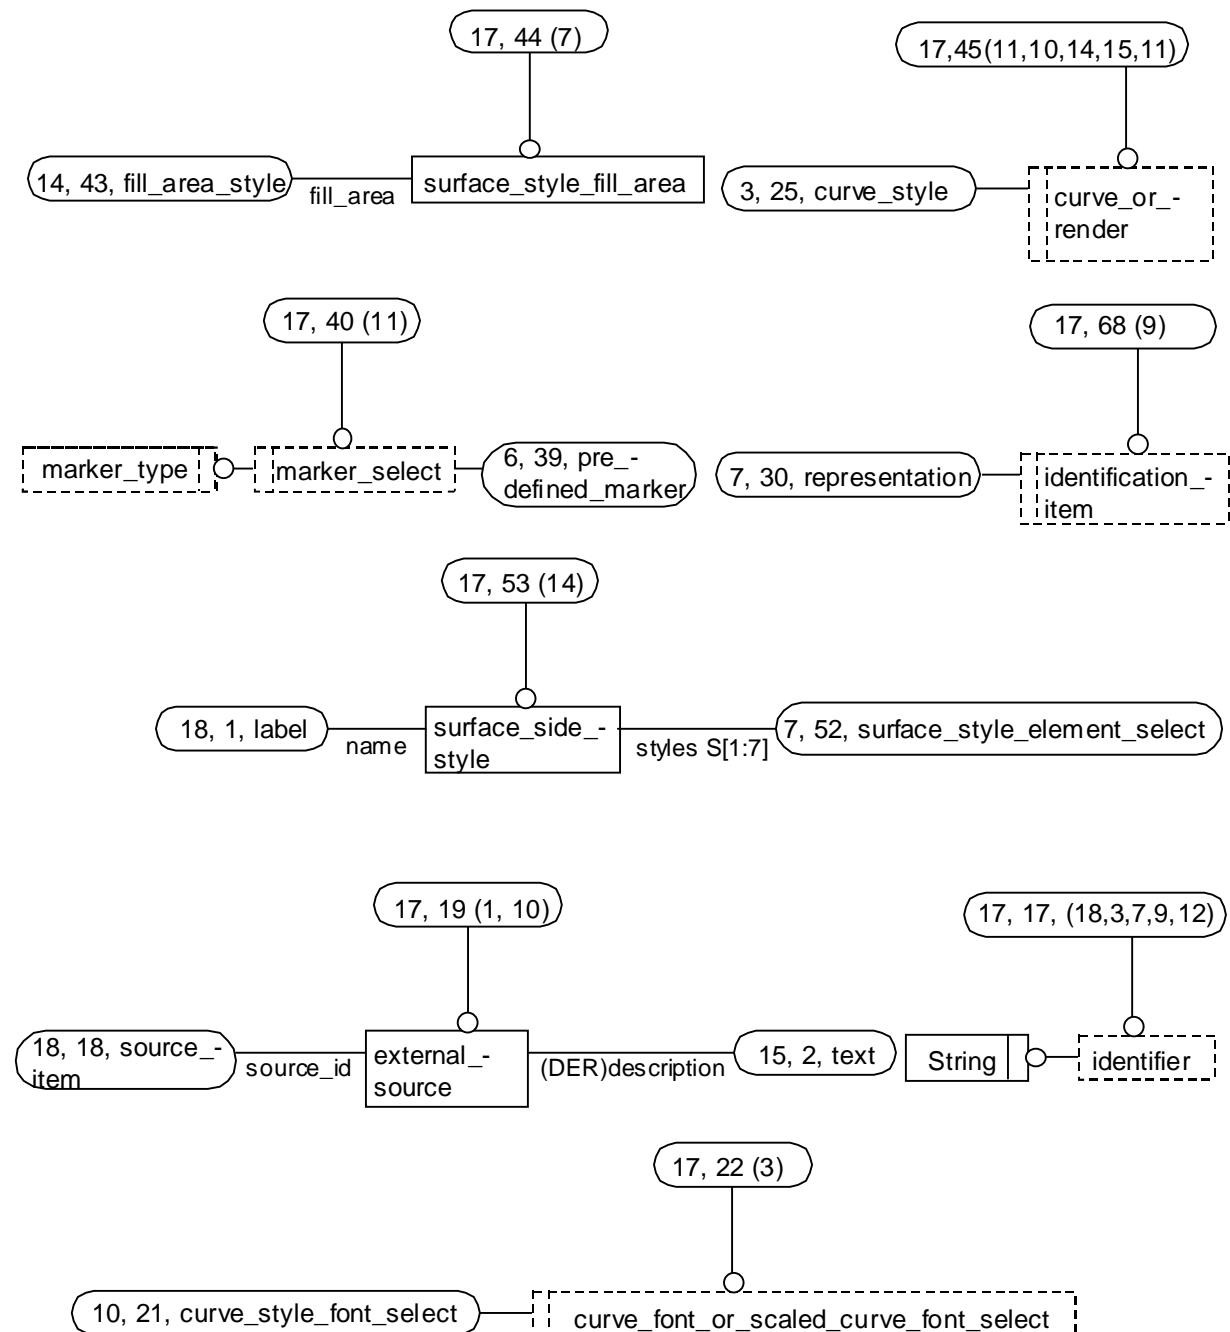


Figure D.15 - MIM EXPRESS-G diagram 15 of 18

**Figure D.16 - MIM EXPRESS-G diagram 16 of 18**

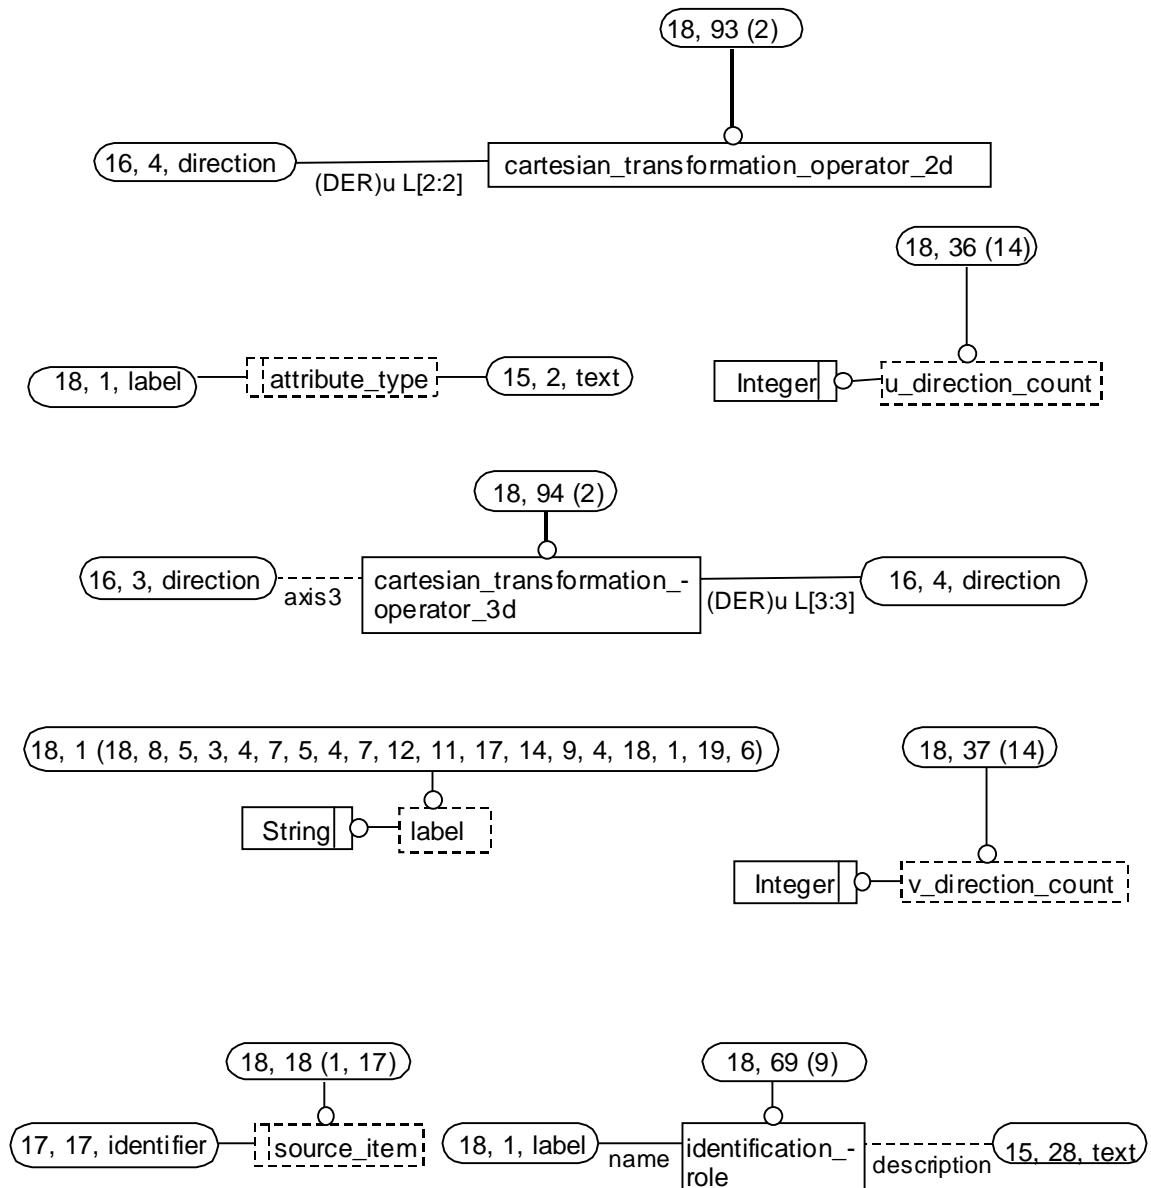


Figure D.17 - MIM EXPRESS-G diagram 17 of 18

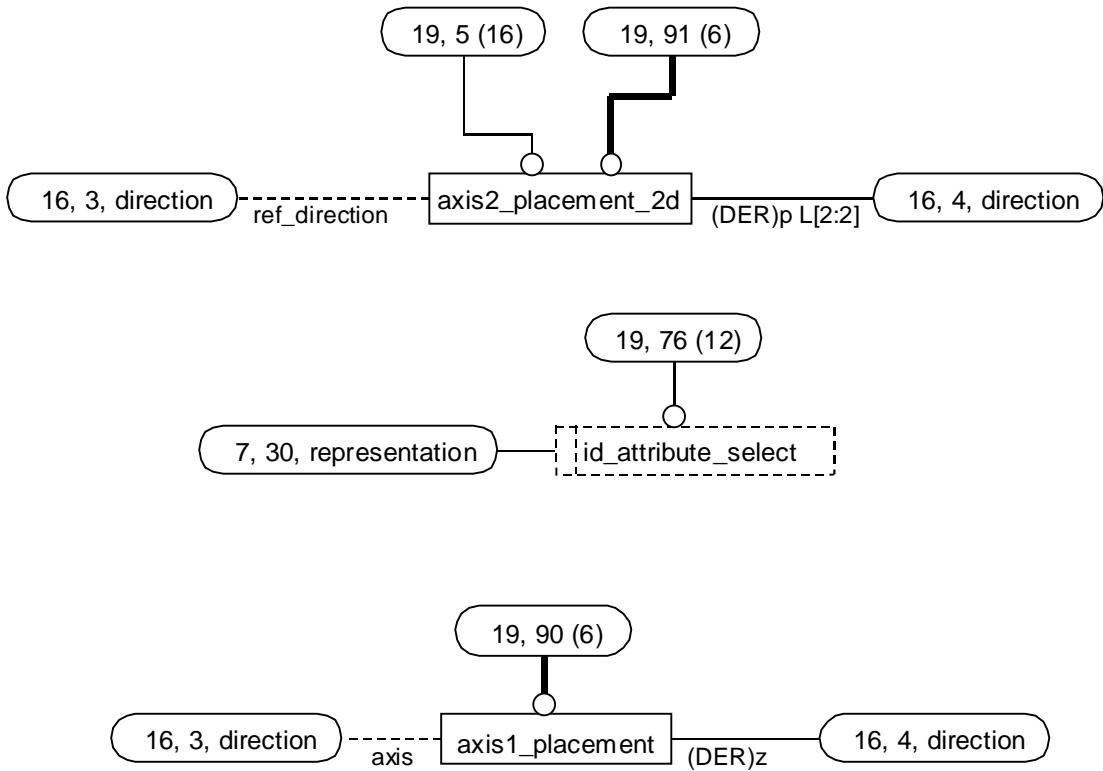


Figure D.18 - MIM EXPRESS-G diagram 18 of 18

Annex E

(informative)

AM ARM and MIM EXPRESS

This annex provides a listing of the EXPRESS for the ARM specified in clause 4 and EXPRESS schema specified in 5.2 of this part of ISO 10303 without comments or other explanatory text. The content of this annex is available in computer-interpretable form and can be found at the following URLs:

<http://www.nist.gov/sc4/nwi_pwi/nwi/step/part1007/general_surface_appearance_arm.exp>

<http://www.nist.gov/sc4/nwi_pwi/nwi/step/part1007/general_surface_appearance_mim.exp>

Bibliography

- [1] ISO 10303-1001:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Appearance assignment.*
- [2] ISO 10303-1002:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Colour.*
- [3] ISO 10303-1003:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Curve appearance.*
- [4] ISO 10303-1004:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Elemental shape.*
- [5] ISO 10303-1005:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Elemental topological shape.*
- [6] ISO 10303-1006:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Foundation representation.*
- [7] ISO 10303-1008:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Layer assignment.*
- [8] ISO 10303-1009:¹ *Industrial automation systems and integration — Product data representation and exchange — Application module: Shape appearance and layers.*
- [9] ISO TC 184/SC4 1997, *Proposed Standing Document — Guidelines for application module development, revision 0.6* <<http://wg10step.aticorp.org/Deliverables/Guidelines/AMContent/Draft6/AMConGde06.html>>.

¹⁾ To be published

Index

AM ARM and MIM EXPRESS.....	41
applied_identification_assignment	
MIM EXPRESS-G	31
ARM EXPRESS-G	18
axis1_placement	
MIM EXPRESS-G	40
axis2_placement_2d	
MIM EXPRESS-G	40
axis2_placement_3d	
MIM EXPRESS-G	29
boundary_curve_appearance	
application object	5
ARM EXPRESS-G.....	19
mapping table	10
cartesian_point	
MIM EXPRESS-G	31
cartesian_transformation_operator	
MIM EXPRESS-G	23
cartesian_transformation_operator_2d	
MIM EXPRESS-G	39
cartesian_transformation_operator_3d	
MIM EXPRESS-G	39
colour	
MIM EXPRESS-G	21
colour_rgb	
MIM EXPRESS-G	21
colour_specification	
MIM EXPRESS-G	21
control_grid_appearance	
application object	5
ARM EXPRESS-G.....	19
mapping table	10
curve_style	
MIM EXPRESS-G	24
curve_style_font	
MIM EXPRESS-G	29
curve_style_font_pattern	
MIM EXPRESS-G	37
dimensional_exponents	
MIM EXPRESS-G	32
direction	
MIM EXPRESS-G	37
draughting_pre_defined_colour	
MIM EXPRESS-G	29
draughting_pre_defined_curve_font	
MIM EXPRESS-G	24
external_source	

MIM EXPRESS-G	38
externally_defined_colour	
MIM EXPRESS-G	21
externally_defined_curve_font	
MIM EXPRESS-G	21
externally_defined_item	
MIM EXPRESS-G	21
externally_defined_marker	
MIM EXPRESS-G	27
externally_defined_symbol	
MIM EXPRESS-G	21
externally_defined_terminator_symbol	
MIM EXPRESS-G	21
functionally_defined_transformation	
MIM EXPRESS-G	25
geometric_representation_context	
MIM EXPRESS-G	24
geometric_representation_item	
MIM EXPRESS-G	30
global_uncertainty_assigend_context	
MIM EXPRESS-G	27
global_unit_assigned_context	
MIM EXPRESS-G	24
id_attribute	
MIM EXPRESS-G	34
identification_assignment	
MIM EXPRESS-G	31
identification_role	
MIM EXPRESS-G	39
information_object_registration	17
item_defined_transformation	
MIM EXPRESS-G	31
mapped_item	
MIM EXPRESS-G	26
measure_with_unit	
MIM EXPRESS-G	27
MIM EXPRESS-G	20
MIM short names of entities	16
name_attribute	
MIM EXPRESS-G	40
parameter_line_appearance	
application_object	6
ARM EXPRESS-G.....	19
mapping_table	10
placement	
MIM EXPRESS-G	27
point	

MIM EXPRESS G.....	31
point_style	
MIM EXPRESS-G	33
pre_defined_colour	
MIM EXPRESS-G	29
pre_defined_curve_font	
MIM EXPRESS-G	24
pre_defined_item	
MIM EXPRESS-G	26
pre_defined_marker	
MIM EXPRESS-G	27
pre_defined_symbol	
MIM EXPRESS-G	23
pre_defined_terminator_symbol	
MIM EXPRESS-G	23
representation	
MIM EXPRESS-G	28
representation_context	
MIM EXPRESS-G	24
representation_item	
MIM EXPRESS-G	26
representation_relationship	
MIM EXPRESS-G	25
representation_relationship_with_transformation	
MIM EXPRESS-G	25
segmentation_curve_appearance	
application object	6
ARM EXPRESS-G.....	19
mapping table	10
shape_representation	
MIM EXPRESS-G	28
shape_representation_relationship	
MIM EXPRESS-G	25
silhouette_curve_appearance	
application object	6
ARM EXPRESS-G.....	19
mapping table	10
surface_appearance_wireframe	
application object	7
ARM EXPRESS-G.....	19
mapping table	11
surface_colour	
application object	7
ARM EXPRESS-G.....	19
mapping table	11
surface_related_curve_appearance	
application object	7
ARM EXPRESS-G.....	19
mapping table	12
surface_side_style	
MIM EXPRESS-G	38

surface_style_segmentation_curve	
mapping table	10
surface_style_boundary	
mapping table	10
MIM EXPRESS-G	33
surface_style_control_grid	
mapping table	10
surface_style_control_grid	
MIM EXPRESS-G	36
surface_style_element_select	
mapping table	12
surface_style_fill_area	
MIM EXPRESS-G	38
surface_style_parameter_line	
mapping table	10
MIM EXPRESS-G	33
surface_style_segmentation_curve	
MIM EXPRESS-G	35
surface_style_silhouette	
mapping table	10
MIM EXPRESS-G	32
surface_style_usage	
mapping table	11
MIM EXPRESS-G	37
uncertainty_measure_with_unit	
MIM EXPRESS-G	27
user_defined_curve_font	
MIM EXPRESS-G	26
user_defined_marker	
MIM EXPRESS-G	26
user_defined_terminator_symbol	
MIM EXPRESS-G	26
vector	
MIM EXPRESS-G	36